

Separate the equipment from the bedding

Location review 1:125 at A3 | Full gym retained | South up / north down / east left / west right



WHAT THIS LOCATION DOES - AND DOES NOT - RESOLVE

The candidate volume does not overlap an existing wall opening in plan.
Only 0.25 m / 0.30 m separates it from the neighbouring window extents; daylight and roof edges need review.
Outdoor heat pump, air terminals and discharge routes are not positioned; the annexe is for indoor equipment.
It preserves existing interior room sizes. The conditional linen layout only applies if relocation is accepted.

MOST PROMISING / FAMILY-WING ANNEXE

An insulated, dry plant room beside the linen store.
2.20 x 2.00 m clear, with external service access.
Near the family bathrooms and existing plant allowance.
Keeps the full gym and fitted utility intact.

THE ARCHITECTURAL COST

Adds 2.55 x 2.70 m, or 6.89 m2, to the footprint.
New foundations, walls, door and roof junction.
The plot, boundaries, roof and drainage are unknown.
It is a candidate volume, not an approved extension.

OTHER LOCATIONS REVIEWED


Existing store: insufficiently defined for all services.
Utility: would displace the developed laundry joinery.
Gym corner: ruled out by your full-gym preference.
Service-end annexe: longer family hot-water routes.
Roof void: filters and heavy equipment need access.

RECOMMENDED NEXT DESIGN CHECK

Ask the services designer to confirm the plant package,
duct space, maintenance access and hot-water routes.
Then test the candidate against the actual plot
and develop its roof / wall junction.

Reserve maintenance space as well as equipment

Candidate plant room plan 1:20 at A3 | 2.20 x 2.00 m clear | Provisional 2.60 m internal height

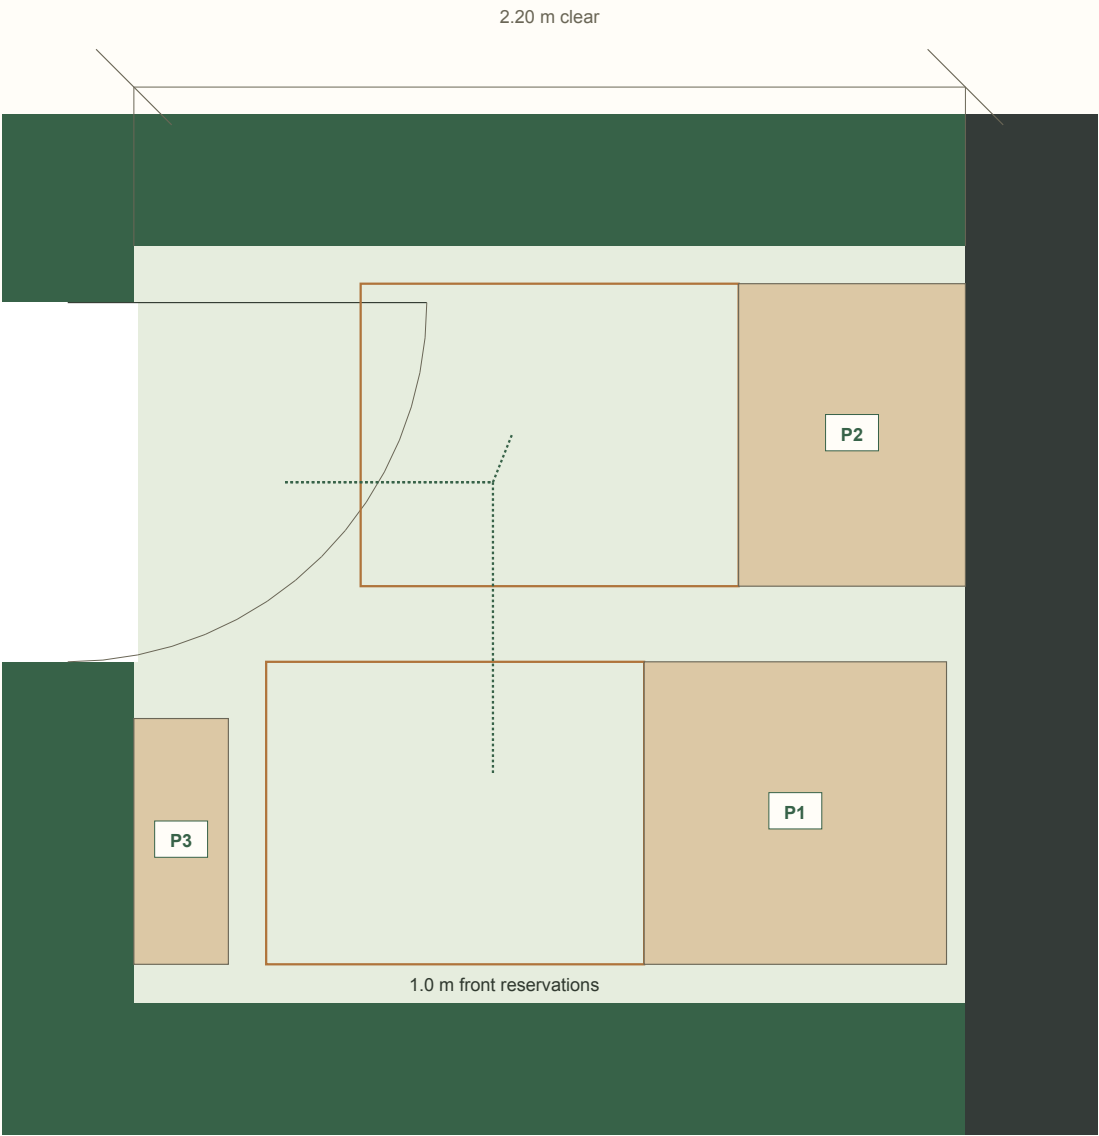

P1 / HOT-WATER CYLINDER

Reserve 0.80 x 0.80 m and 1.85 m height as a first fit test.
Reference uniSTOR HP 300: 595 mm body diameter, 1745 mm high.
The reference drawing includes connections beyond the cylinder body.
300 litres is a size reference, not a selected or calculated capacity.
Check expansion vessel, valves, discharge and replacement handling.

P2 / VENTILATION UNIT

Reserve 0.80 m along the wall x 0.60 m projection, 0.90 m high.
Reference Q450: 725 x 570 x 850 mm (width x depth x height).
Mounting proposal: base 1.10 m, top 2.00 m; duct space above.
The reference installer manual calls for 1.0 m maintenance space in front.
Airflow capacity, silencers and the full duct assembly remain unverified.

P3 / CONNECTIONS + CONTROLS

Reserve a shallow wall area; this does not represent a complete package.
Hydraulics, electrical equipment and pipework need coordinated separation.
Manifolds may need distributed accessible locations elsewhere.
Do not assume a buffer tank, every manifold and all controls fit here.

SITE + CONSTRUCTION TO COORDINATE

Insulation, frost protection, load-bearing floor and safe drainage.
Duct penetrations, outdoor air separation and noise near bedrooms.
Heat-pump selection, outdoor siting and the distribution strategy.
Provisional equipment heights are not an installation approval.

SERVICE ACCESS

Amber outlines are clear floor reservations, not cabinets.
Internal 0.70 m approach envelopes clear the equipment allowances.
D21: 0.95 m external opening allowance; frame / clear width to select.
No plot-side approach, lifting, removal or door-handling test is claimed.

Sources: Vaillant uniSTOR HP installation manual, dimensions / siting.


Zehnder Q450 data and ComfoAir Q installer manual, section 2.

A dedicated linen cupboard with room to reach the shelves

Conditional linen plan and elevation 1:20 at A3 | Only after plant relocation is selected and designed



SHELVING / 2.00 M



0.55 m depth / five shelf levels

THE STORAGE GAIN

- Shelf run increases from 0.90 m to 2.00 m.
- Depth increases from 0.45 m to 0.55 m for bedding.
- Two nominal 1.00 m bays; dividers / boards reduce usable width.
- Middle shelves for towels and sheets, lower shelves for bulkier items.
- Keep everyday items within comfortable reach; check actual folded stacks.

ACCESS + LIMITS

- Retain D04 and its swing; keep the shelf end clear of the leaf.
- All 40 house routes pass with the conditional shelving in place.
- The full gym and previous room / door / window geometry are unchanged.
- Keep the existing plant reservation until relocation is approved.
- No new shelf capacity is counted as available in the current design.